

Quotation Notice

Competitive quotations are invited from interested vendors within Kerala for providing networking facility in the newly allotted space for Planning sections , located in the first floor of Main Building,Senate House Campus,University of Kerala, Palayam, .


(Specifications appended)

Conditions

1. The rate quoted should be inclusive of Tax, transportation charges, installation charges and any other charges.
2. Complaints with the items supplied should be rectified/replaced to the satisfaction of the University by the suppliers at their own cost.
3. Payment will be made only after the supply and installation of the items at our site.
4. The undersigned reserves the right to reject/accept any quotation without assigning any reason.

The sealed quotations should be addressed to the undersigned superscribing as **“Quotation for providing networking facility in the newly allotted space for Planning sections located in the first floor of Main Building,Senate House Campus, University of Kerala, Palayam”**. The last date of receipt of quotations is at 3:00 p.m. on 24.06.2024. The quotations will be opened at 3:30 p.m. on the same day in the presence of the vendors, then present.

REGISTRAR

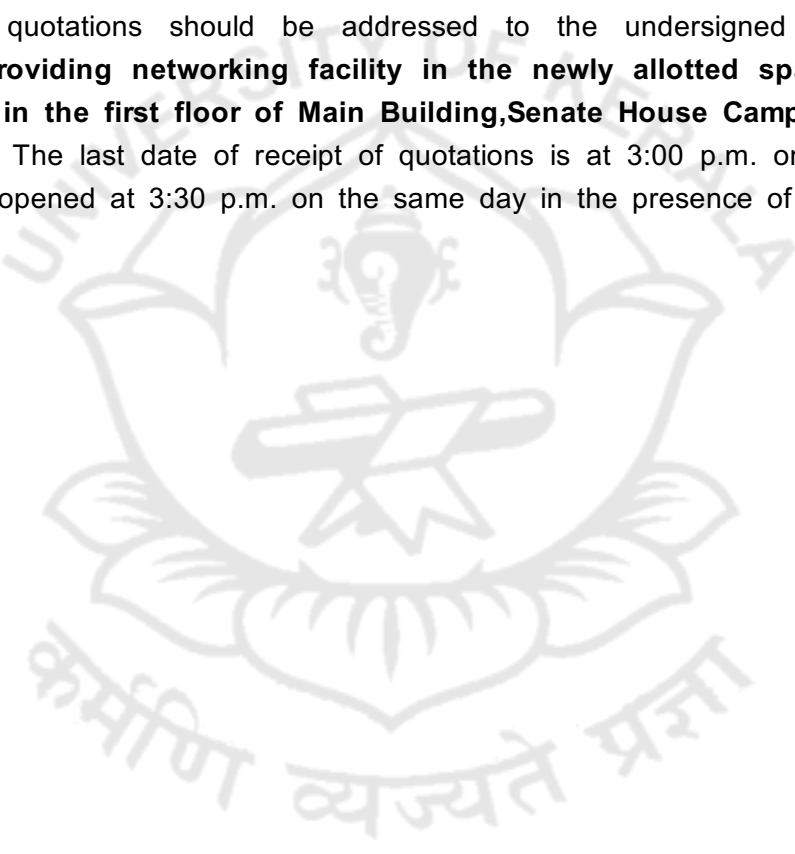

Specifications

<p align="center">Estimate for providing additional structured network provisions for newly allotted space for Planning Section in the first floor of SH building, University of Kerala</p>					
Sl.No.	Item	Qty	Unit	Amount	Total
1	Cat 6e UTP Cable (Molex/AMP/Commscope/NORDEN)	450	Mtr		
2	Information Outlet (Molex/AMP/Commscope/NORDEN)	20	Nos.		
3	Single Shutter Faceplate	20	Nos.		
4	3/3 SMB (box)	20	Nos.		
5	25mmWhite ISI PVC Pipe with accessories	50	Mtr		
6	50 X 50 DLP PVC Trunking with accessories (T, End cap, Corner cap etc) - Honeywell/ Legrand/ Scheider/ equivalent)	20	Mtr		
7	24 port Cat6e patch panel-Fully loaded- Molex/ equivalent	1	No.		
8	Cat6e 1 mtr Patch cord-Molex or equivalent	21	Nos.		
9	Cat6e 2 mtr Patch cord-Molex or equivalent	20	Nos.		
Labour					
10	Cat6e UTP Laying Charges	450	Mtr		
11	RJ45/IO Termination Charges	20	Nos.		
12	Faceplate Fixing Charges	20	Nos.		
13	3/3PVC Box fixing Charges (Surface)	20	Nos.		
14	Fixing and Dressing of wall mount rack	1	No.		
15	Fixing and ports termination of 24 Port Patch panel	1	No.		
16	Fixing and configuration of switch	1	No.		



17	20mm/25 mm/32mm white PVC Pipe Laying Charges through surface	50	Mtr		
18	50 X 50 DLP PVC Trunking laying charges	20	Mtr		
19	Wiring Electrical point (With 2 switches and two 6A plug Point) if necessary	1	No.		
20	1 KVA UPS (Double Battery backup) with wall mount stand	1	No.		
21	Testing, Commissioning and Labeling of Network	1	No.		
Total					

The Guarantee of the items shall be specified in the quotation.

