

No:2421(1)

Re- Quotation Notice

Competitive quotations are invited from interested vendors within Kerala for provision of Networking Facility in the Pro-Vice- Chancellor's Chamber, Main Building, Senate House Campus, Palayam.


(Specifications appended)

Conditions

1. The rate quoted should be inclusive of Tax, transportation charges, installation charges and any other charges.
2. Complaints with the items supplied should be rectified/replaced to the satisfaction of the University by the suppliers at their own cost.
3. Payment will be made only after the supply and installation of the items at our site.
4. The undersigned reserves the right to reject/accept any quotation without assigning any reason.

The sealed quotations should be addressed to the undersigned superscribing as “**Quotations for providing Networking Facility at Pro-Vice- Chancellor's Chamber , Main Building, S H Campus,Palayam,Thiruvananthapuram**”. The last date of receipt of quotations is at 3:00 p.m. on 26.07.2024 . The quotations will be opened at 3:30 p.m. on the same day in the presence of the vendors then present.

Registrar

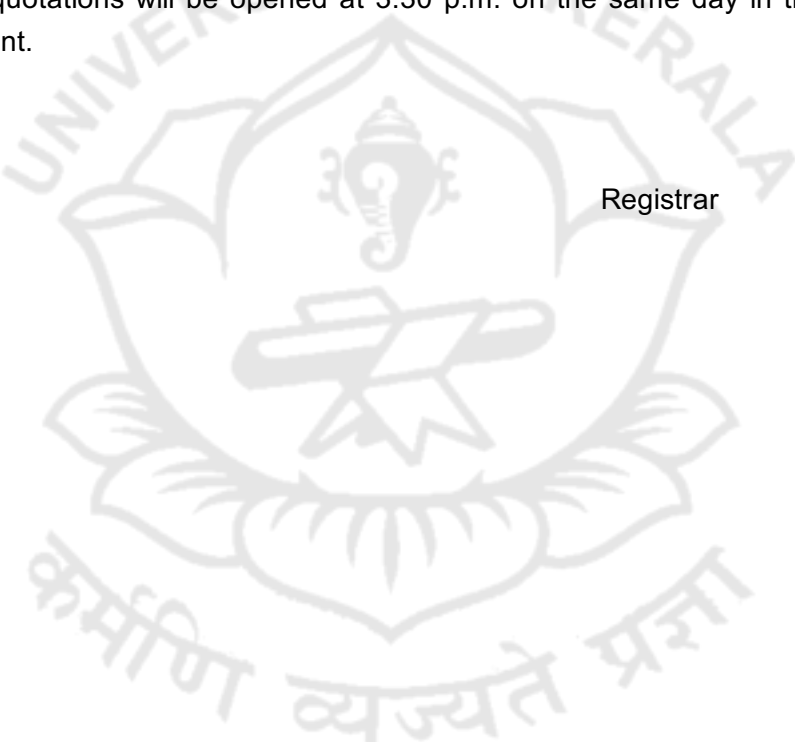

The document is digitally approved. Hence signature is not needed.



Specification

Providing Structured Cabling/ Networking Facility in the PVC's Chamber at SH Campus, University of Kerala.					
Materials					
S1. No.	Item	Qty	Unit	Unit rate	Estimated cost
1	Cat 6e UTP Cable(Molex/AMP/Commscope/NORDEN)	270	Mtr		
2	Information Outlet(Molex/AMP/Commscope/NORDEN)	11	Nos.		
3	Single Shutter Faceplate	11	Nos.		
4	3/3 SMB (box)	11	Nos.		
5	25 mm White ISI PVC Pipe with accessories	80	Mtr		
6	Cat6e 2mtr Patchcord-Molex or equivalent	7	Nos.		
7	Cat6e 2mtr Patchcord-Molex or equivalent	11	Nos.		
8	8 port 1000Mbps Ethernet Switch with 3year Warranty (Netgear/ D Link/ TP Link)	1	Nos.		
Labour					
9	Cat 6e UTP Laying Charges	270	Mtr		
10	RJ45/IO Termination Charges	18	Nos.		
12	Faceplate Fixing Charges	11	Nos.		
13	3/3PVCBoxfixingCharges(Surface)	11	Nos.		
15	20mm/25mm/32mm white PVC Pipe Laying Charges through surface	80	Mt.		
16	Fixing of Ethernet Switch	1	No.		
18	Dismantling and rearranging of Old Network Cables Including PVC Pipe	4	Nos.		
19	Testing, Commissioning and Labelling of Network	1	Nos		



The guarantee of the items shall be specified in the quotation.