

## **Re-Quotation Notice**

Competitive quotations are invited from interested vendors within Kerala for providing network connections at Estate Officer's Section located at Old SDE building,SH Campus,Palayam.


### **(Specifications appended)**

### **Conditions**

1. The rate quoted should be inclusive of Tax, transportation charges, installation charges and any other charges.
2. Complaints with the items supplied should be rectified/replaced to the satisfaction of the University by the suppliers at their own cost.
3. Payment will be made only after the supply and installation of the items at our site.
4. The undersigned reserves the right to reject/accept any quotation without assigning any reason.

The sealed quotations should be addressed to the undersigned superscribing as "**Quotation for providing network connections at Estate Officer's Section located at Old SDE building,SH Campus,Palayam**". The last date of receipt of quotations is at 3:00 p.m. on 24.07.2024. The quotations will be opened at 3:30 p.m. on the same day in the presence of the vendors, then present.

**REGISTRAR**

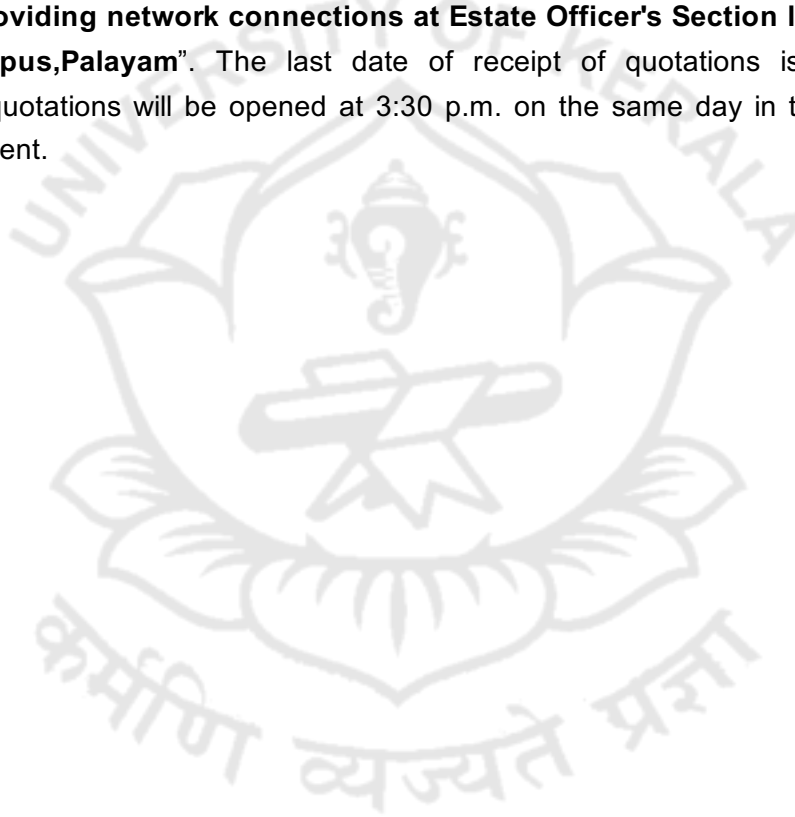

Specifications

<b>Structured Networking at the Estate Officer's room at SH Campus, University of Kerala.</b>					
<b>Sl.No.</b>	<b>Item</b>	<b>Qty</b>	<b>Unit</b>	<b>Amount</b>	<b>Total</b>
1	Cat 6e UTP Cable (Molex/AMP/Commscope/NORDEN)	240	Mtr		
2	Information Outlet (Molex/AMP/Commscope/NORDEN)	5	Nos.		
3	Single Shutter Faceplate	5	Nos.		
4	3/3 SMB (box)	5	Nos.		
5	RJ45 Connectors with Boot	2	Nos.		
6	20mm White ISI PVC Pipe with accessories	65	Mtr		
7	25mm White ISI PVC Pipe with accessories	45	Mtr		
8	Cat6e 1mtr Patch Cord-Molex or equivalent	6	Nos.		
9	Cat6e 2mtr Patch cord-Molex or equivalent	5	Nos.		
10	Network Rack9U,with power sockets, FAN, PDU and accessories- (Netrack/Valrack/Rittal/Dlink)	1	No.		
11	24 port Cat6e patch panel – Fully loaded - Dlink/Molex/equivalent	1	Nos.		
12	Cable Manager-1U	1	No.		
13	8 port 1000 Mbps Ethernet Switch with 3 Year warranty (Netgear/DLink/TPLink)	1	Nos.		
<b>Labour</b>					
14	Cat 6e UTP Laying Charges	240	Mtr		
15	RJ45/IO Termination Charges	5	Nos.		
16	Faceplate Fixing Charges	5	Nos.		
17	3/3PVC Box fixing Charges (Surface)	5	Nos.		
18	Fixing and Dressing of wall mount rack	1	No.		
19	Fixing and ports termination of 24 Port Patch panel.	1	No.		



20	Fixing and Configuration of Switch	1	No.		
21	20mm/25 mm/32mm white PVC Pipe Laying Charges through surface	110	Mtr		
22	Wiring Electrical point (With 2 switches and two 6A plug Point) if necessary	1	No.		
23	1KVAUPS (Double battery backup) with wall mount stand	1	Nos.		
24	Testing, Commissioning and Labeling of Network	1	No.		
<b>Total</b>					

The Guarantee of the items shall be specified in the quotation.

